

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
29 March 2001 (29.03.2001)

PCT

(10) International Publication Number  
**WO 01/21399 A1**

(51) International Patent Classification<sup>7</sup>: B32B 31/00,  
B30B 5/06, D04H 3/04

(21) International Application Number: PCT/US00/25680

(22) International Filing Date:  
20 September 2000 (20.09.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/155,364 20 September 1999 (20.09.1999) US

(71) Applicant (for all designated States except US): HUNTER  
DOUGLAS INC. [US/US]; 2 Park Way, Upper Saddle  
River, NJ 07458-0740 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): COLSON, Wendell,  
B. [US/US]; 12 Tech Circle, Natick, MA-01760 (US).  
DANN, Kevin [US/US]; 12 Tech Circle, Natick, MA  
01760 (US).

(74) Agents: LINEK, Ernest, V. et al.; Banner & Witcoff, Ltd.,  
28 State Street, 28th floor, Boston, MA 02109 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,  
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,  
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,  
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,  
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,  
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,  
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- With international search report.
- Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PRESSURE LAMINATOR APPARATUS AND NON-WOVEN FABRIC FORMED THEREBY

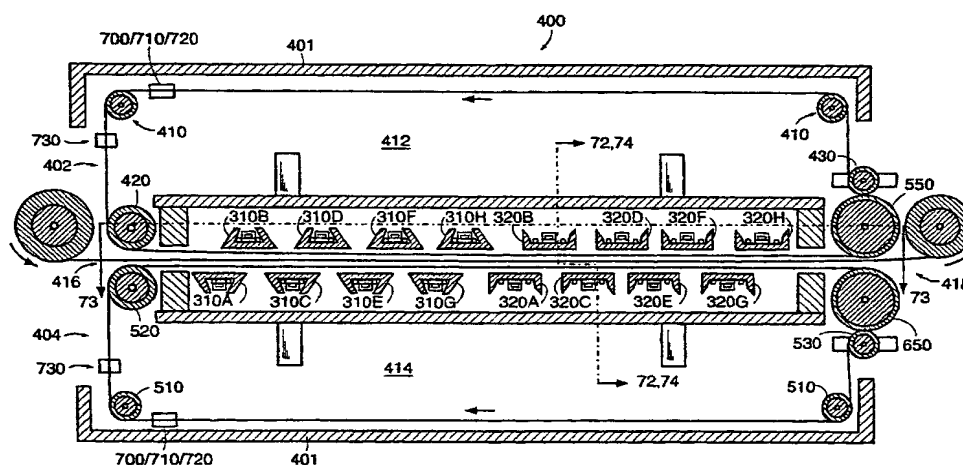

(57) Abstract: This invention relates to a lamination apparatus and in particular to a dual belt driven, continuous pressure lamination apparatus that utilizes pressure, heat and cooling to bond at least two substrates (plies) with an adhesive between the layers of the substrates. The pressure laminator of the present invention has been specifically designed to permit the permanent joining of at least two fabric substrates with an adhesive between the fabric substrates, with little or no shrinkage occurring during the lamination process. The resulting non-woven fabric advantageously has the appearance of a woven fabric, but has superior strength characteristics there over. The pressure laminator of the present invention can have other uses, for example, printed circuit board substrate manufacture, and the like, as will be appreciated by those having ordinary skill in this art.



- 1 -

PRESSURE LAMINATOR APPARATUS  
AND NON-WOVEN FABRIC FORMED THEREBY

CROSS-REFERENCE TO RELATED APPLICATION

This application claims priority under 35 U.S.C. §119 from commonly owned provisional application, U.S.S.N. 60/155,364, filed 20 September 1999, the disclosure of which is hereby incorporated herein by reference.

FIELD OF THE INVENTION

This invention relates to a lamination apparatus and in particular to a dual belt driven, continuous pressure lamination apparatus that utilizes pressure, heat and cooling to bond at least two substrates (plies) with an adhesive between the layers of the substrates. The laminator of the present invention overcomes many of the disadvantages of prior art laminators, including shrinkage of materials, and the like.

SUMMARY OF THE INVENTION

This invention relates to a lamination apparatus and in particular to a dual belt driven, continuous pressure lamination apparatus that utilizes pressure, heat and cooling to bond at least two substrates (plies) with an adhesive between the layers of the substrates.

- 2 -

The laminator of the present invention can be employed to make a variety of composite and/or reinforced materials. One or more of the component parts of the laminate (i.e., the substrates or plies) may be a woven fabric material, a non-woven fabric web, or a mat of fibers. Adhesive materials, preferably thermoplastic materials, are used to bond the various substrates in the laminate construct. These materials may be melted and remelted over and over. When used to laminate yarns, especially polymer yarns, thermoplastic copolyester adhesives are preferred, as these materials may be selected to have a melting temperature below the melting temperature of the yarns. Industrial type laminates that may be formed using the laminator of the present invention include natural and/or synthetic fabric-based, asbestos-based, glass-based, nylon-based, flame-retardant and/or flame-resistant based, and mixtures thereof. Laminates of other materials may also be prepared as will be appreciated by those having ordinary skill in the field.

Non-woven fabrics are one especially preferred class of materials used as the plies or substrates in the pressure laminator of the present invention. Non-woven fabrics are similar to woven and knitted fabrics in that all are planar, inherently flexible, porous structures composed of natural or synthetic fiber materials (i.e., yarns, threads, or filaments). Non-woven fabrics are unique in that they can be engineered to resemble woven or knitted fabrics, but they can also be made to have superior physical characteristics over woven or knitted fabrics. Thus, non-woven fabrics are highly influenced by the properties of their constituent fibers and the manner in which the non-woven fabric is prepared. Typical methods for preparing non-woven fabrics include mechanical, chemical and thermal interlocking of layers or networks of the fiber materials.

In preferred embodiments, the substrates are at least two non-woven fabric substrates, one of the fabric substrate representing the weft strands and another representing the warp strands. The adhesive used to bond the non-woven substrates should be activated by heat during the lamination process. The combination of pressure, heating to activate the adhesive and rapid cooling

- 3 -

of the joined substrates minimizes shrinkage and sets the yarn size in the final non-woven fabric laminate. In addition, because the laminate is being formed under pressure, the warp and weft yarns are forced into intimate contact, giving the final laminate the appearance of a woven product.

The lamination apparatus of the present invention has an outer housing or frame in which a rectangular pressure box is mounted. The shape of the box need not be rectangular, but this shape is currently preferred. The pressure box comprises two spaced apart sections, an upper section and a lower section, each of which has pressure seals along its four edges, and each of which is further provided with a plurality of both heating and cooling elements. Two counter rotating drive belts, an upper drive belt and a lower drive belt, contact one another at and together run through a space between the two sections of the pressure box. The belts are dimensionally larger (length and width) than the pressure box. This is necessary to permit pressurization of the box, both above and below the two belts. One belt is driven in a clockwise manner and the other belt is driven in a counterclockwise manner. Once the belts are in motion, one end of the pressure box is the inlet (feed) end and one end is the outlet end of the laminator.

The lower section of the pressure box is mounted rigidly to the frame or housing, whereas the upper section of the pressure box can be adjusted as necessary to permit access to the interior of the box. Normally, the sections are spaced apart sufficiently to permit passage of the drive belts there through under pressure (or in a depressurized state), with or without material to be laminated there between.

During the lamination process, substrate materials to be laminated are passed through a pressure seal at the inlet end of the pressure box, and into the space between the two drive belts. Air pressure applied to the upper and lower sections of the pressure box is used to compress the air-impermeable belts toward one another, creating a diaphragm effect between the belts, thereby compressing the substrates situated there between. The upper and lower

- 4 -

sections of the pressure box are equipped with a plurality of heating and cooling elements, which are used to activate and set the thermoplastic adhesive between the substrate layers.

In an especially preferred embodiment, the plurality of heating and cooling bars located in the lower section of the pressure box are rigidly mounted, whereas the plurality of heating and cooling bars in the upper section of the pressure box are mounted so as to float on top of the materials being laminated.

This arrangement has been found to be especially useful in the preparation of non-woven fabrics. Shrinkage is minimized or eliminated and the final laminate has the physical characteristics (feel and appearance) of a thermomechanically finished fabric.

Advantageously, at least about 10%, preferably at least about 25% and most preferably about 50% of the box interior at the inlet end of the pressure box is provided with heat bars, and the remainder of the pressure box, again, at least about 10%, preferably at least about 25% and most preferably about 50% of the box interior, is provided with cooling bars. The heating bars are ideally located at the inlet end of the pressure box and the cooling bars are ideally located at the outlet end of the pressure box. If desired, multiple zones of heating and cooling could be included within the pressure box; e.g., heat/cool, heat/cool, heat/cool, etc.

Movement of the two belts through the pressure box allows for the continuous feeding of substrate materials and thermoplastic adhesive enter the laminator through an entry pressure seal. Once therein, the substrates are nipped or pressed together by the diaphragm effect caused by the pressure applied to the belts. The pressed substrates are then heated under pressure, melting the thermoplastic adhesive. This allows the substrate layers to come closer together, with at least some portions of the warp and weft yarn strands becoming coplanar or nearly coplanar. The heated substrates are then cooled, while still under pressure, forming the final laminate. The cooled laminate exits the pressure box through an exit pressure seal, where it is collected as desired.

- 5 -

When two or more non-woven polyester substrates (e.g., at least one warp substrate and at least one weft substrate) are laminated in this apparatus, the thickness of the laminate at the outlet end of the laminator is at least 5%, preferably at least 10% and most preferably at least about 20% less than the combined thickness of the substrates and thermoplastic adhesive, as measured at the inlet end of the laminator.

The current rectangular pressure has a pressure area about 1500 square inches (in<sup>2</sup>). The drive belts, which are substantially non-porous, are pressurized from both sides of the pressure box with air (or other fluid medium) pressure of at least 2 psi, preferably at least about 5 psi, and most preferably at least about 10 psi. Higher pressures can be achieved with modification of the equipment to support and sustain the same. This pressure applied to the belts is equivalent to a compressive weight (force) ranging from about 5000 lbs to about 50,000 lbs, applied over the 1500 in<sup>2</sup> area of the current pressure box. For laminating non-woven fabrics, a compressive force from about 10,000 lbs to about 25,000 lbs is typical, and a compressive force of about 15,000 lbs (at 10 psi gauge) has been found to be especially preferred to date. This is important because in a traditional laminator, which uses top and bottom platens, if a weight of 15,000 lbs was placed on the top platen to provide the compressive force to effect lamination, any belt running hereunder would likely break. Traditional high pressure laminators usually employ a series of actions; move, stop, press; move, stop, press; etc., when operating in a "continuous" manner.

In the present invention, the use of a fluid pressure medium, e.g., air (or other gas, e.g., steam) or liquid (e.g., water, oil, etc), allows the belts to move, even though being pressured from both the top and the bottom. The belts of the present laminator slide through, even though they encounter forces that would break a belt in a conventional laminator.

This invention is also directed to a method of manufacturing non-woven fabrics using the pressure lamination apparatus, and to the non-woven fabrics formed thereby. The pressure laminator of the present invention has been

- 6 -

specifically designed to permit the permanent joining of at least two non-woven fabric substrates with an adhesive between the fabric substrates, with little or no shrinkage occurring, during the lamination process. While not wishing to be bound by theory, it is believed that shrinkage is prevented or limited herein, due to the high pressure on the belts, which prevents the laminate from slipping, thereby preventing or limiting shrinkage. The resulting non-woven composite fabric advantageously has the appearance of a woven fabric, but has superior strength characteristics there over.

While designed for a specific purpose, the pressure laminator of the present invention can have other uses, for example, printed circuit board substrate manufacture, decorative laminating, industrial laminating, and the like, as will be appreciated by those having ordinary skill in this art.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a side view of a preferred embodiment of the pressure box and drive belt system for the laminator of the invention in which eight heater bars (four in each section) and eight cooling bars (four in each section) are used for pressure lamination of non-woven fabric substrates;

FIG. 2 is an end view of the pressure box of Figure 1, which shows the pressure delivery system for the upper and lower sections of the pressure box;

FIG. 3 is a top view of the upper section of the pressure box of Figure 1, showing the spacing of the heating and cooling bars;

FIG. 4 is a side view of the pressure box of Figure 1, showing the mounting brackets for the upper section (displaceable) heating and cooling bars and the mounting brackets for the lower section (fixed) heating and cooling bars. Also shown is one embodiment of a side sealing element;

FIG. 4A illustrates the side pressure seal of FIG. 4 in greater detail.



- 7 -

FIG. 5 is a side view of the pressure box of Figure 1, showing one embodiment of the pressure box inlet pressure seal element; and

FIG. 6 is a side view of the pressure box of Figure 1, showing one embodiment of the pressure box outlet pressure seal.

FIGS. 7A, 7B and 7C illustrate aspects of the inflatable rubber bladder seal embodiment for the pressure box sections.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

As described above, the present invention is directed to a lamination apparatus and in particular to a dual belt driven, continuous pressure lamination apparatus that utilizes pressure, heat and cooling to bond at least two substrates (plies) with an adhesive between the layers of the substrates. If desired, the laminator of the present invention could also be used to stabilize a single ply material.

In general, the pressure lamination apparatus of this invention comprises a housing or frame in which a pressure box is mounted. The pressure box comprises two spaced apart pressure sections, an upper section and a lower section, wherein the space formed between the two pressure sections defines the lamination section. Two counter rotating drive belts, an upper drive belt and a lower drive belt, are rotatably mounted in the housing or frame, and the belts contact one another and are pulled through the lamination section by drive rollers mounted at the outlet end. A pressure generator is used to supplying air (or other fluid medium - liquid or gas) pressure to the upper and lower sections of the pressure box for compressing substrate materials carried between the two drive belts. Pressure is maintained because the box has pressure seals all around the points of contact with the belt.

In the rectangular box of one preferred embodiment, metal side seals are provided on the sides of both the upper and lower sections of the pressure box.

- 8 -

Metal inlet and outlet seals are also provided on the upper and lower sections of the pressure box, ensuring that the desired diaphragm effect can be created therein. When pressurized, the apparatus caused the pressure lamination of substrates situated between the two belts.

In the rectangular box of another preferred embodiment, Teflon® (PTFE) or rubber coated metal side seals are provided on the sides of both the upper and lower sections of the pressure box. Rubber inlet and outlet seals are also provided on the upper and lower sections of the pressure box, ensuring that the desired diaphragm effect can be created therein. When pressurized, the apparatus caused the pressure lamination of substrates situated between the two belts.

Referring to FIG. 1, a number of the essential components of the preferred pressure box 1 used in the pressure laminator of the present invention are shown in cross-section. As illustrated, two rotatable belts, top belt 2 and bottom belt 4, mounted on a plurality of support rollers (top - 110, 120, 130; bottom - 210, 220, 230), are pulled through the pressure box 1, between the upper section 12 and the lower section 14, entering at the inlet end 16 and exiting at the outlet end 18, by their respective drive rollers 150 (top) and 250 (bottom).

Alignment of the two rotating belts 2 and 4, is maintained by an electric alignment system comprising an alignment carriage 300, alignment pivot 310, electric alignment servo 320 and electric alignment eye 330. If either of the belts moves out of alignment, the electric eye 330 detects the same and activates the alignment servo, which causes the belt to be adjusted as necessary by lateral movement of the alignment carriage 300.

In the illustrated embodiment, eight spaced apart radiant heat bars (10A, 10B, 10C, 10D ... 10H) are shown at the inlet end 16 of pressure box 1 and eight spaced apart cooling bars (20A, 20B, 20C, 20D ... 20H) are shown at the outlet end 18 of pressure box 1. Four of the heat bars are rigidly mounted in the

- 9 -

lower section 14 of the pressure box 1, namely heat bars 10A, 10C, 10E and 10G. The other four radiant heat bars (10B, 10D, 10F and 10H) are flexibly mounted such that they float above the upper belt, permitting materials of varied thickness to pass there under. Four of the cooling bars are rigidly mounted in the lower section 14 of the pressure box 1, namely cooling bars 20A, 20C, 20E and 20G. The other four cooling bars (20B, 20D, 20F and 20H) are flexibly mounted such that they float above the upper belt, permitting materials of varied thickness to pass there under.

As illustrated, the plurality of heating and cooling bars are preferably arranged in a staggered configuration. Thus, the substrate is heated from below, then above, then below, etc., and the cooling is accomplished in the same manner; the substrate is cooled from below, then above, then below, etc. This arrangement permits rapid and uniform heating, as well as rapid and uniform cooling of the substrate materials being laminated in the pressure laminator. The uniformity of heating and cooling under pressure leads to improved physical characteristics of the resulting laminates. In the case of non-woven fabrics laminated in this manner, shrinkage of the fabrics is held to a minimum and the resulting laminated material has the appearance and feel of a woven fabric.

In one embodiment, at least 75 percent of the belt width is heated and cooled by these elements. For example, on a 29-inch wide belt, the central 22 inches are heated and cooled. On a 76-inch wide belt, the central 60 inches would be heated and cooled. The Reliant ER177A heat bars (England) are each provided with a thermocouple to measure the temperature delivered to the belts. The cooling bars are each provided with water fed cooling pipes.

In another embodiment, the heating and cooling is accomplished by steam and cold water; each fed to an appropriate section of the laminator, in both the upper and lower sections. The use of a high-pressure gas and fluid medium creates both pressure and the requisite heating/cooling action that was alternatively achieved by the heating and cooling bars together with high-pressure air. If desired, infra-red heating may also be employed in this

- 10 -

embodiment, and cooling may be accomplished by other means, including water spray, providing non-contact heating and/or cooling options.

The thickness of the PTFE impregnated fiberglass belt can be modified as desired, and depends on the nature of the materials being laminated and the desired operating speed in feet per minute (fpm). For laminating non-woven fabrics, a belt thickness ranging from 2 to 20 mil, preferably 5 to 15 mil has been found satisfactory. Belts of 14-mil thickness have been operated at 5 fpm, with a temperature of 380°F being delivered to the substrates. Belts of 5-mil thickness have been operated at 12 fpm, with a temperature of 380°F being delivered to the substrates. Optimum belt speeds of 50, 60, 70 ... 100 fpm can be achieved by modification of the belt thickness and/or composition. The optimum belt speed for non-woven fabric lamination is currently believed to be 60-70 fpm. Another way in which to achieve higher speeds is to simply increase the size of the laminator apparatus. The current preferred apparatus has a length of about 4 feet. Increasing the size 2-10X would allow for faster operating speeds.

During the lamination process the substrate material may create a counter-pressure as any entrapped air in the substrates expands. To deal with this counter-pressure, at least one (or both) of the PTFE (Teflon®) impregnated fiberglass drive belts used in the pressure laminator of the present invention can be modified on the outside edges, to comprise a thick (about 0.125 inch) porous glass fiber mat. This porous glass fiber mat allows the expanded air from the heated laminate to escape via this sideways (transverse) porosity.

Figure 2 illustrates in cross-section, the end view of pressure box 1, showing in particular the air pressure feed line 400, and the preferred points of contact thereof 402 and 404 with the upper section 12 and lower section 14 of the pressure box, respectively. The pressure box is advantageously made out of metal, such as aluminum (from 2 to 5 inches thick) and is held together by a plurality of threaded steel rods and nuts 406 and 408. As shown in Fig. 2, the heating and cooling bars located in the lower section 14 of the pressure box are

- 11 -

locked in place at each end by a fixed bracket 410. The heating and cooling bars located in the upper section 12 of the pressure box ride on a pin bracket mount 412, which allows upward motion of the bars, while gravity keeps the bars resting on the upper belt. A plurality of cooling water lines, inlet 414 and outlet 416 are also shown in this illustration. The electrical heating wires (not shown) are provided in a manner similar to the water lines.

Figure 3 illustrates a top view of the interior of the upper section 12 of the pressure box 1, showing the currently preferred arrangement of the upper heating bars (10B, 10D, 10F and 10H) and cooling bars (20B, 20D, 20F and 20H). The pressurized box 1 is held together by steel bars 500 mounted to the threaded rods 406 shown in the four corners. Not shown in this illustration are the nuts that thread thereon. The sides 2 of the housing or frame, to which the steel bars and all rollers and controls are mounted, are also shown in this drawing.

Figure 4 illustrates, the pin bracket 412 for the upper section, vertically displaceable, heating and cooling bars. As illustrated, the pin bracket comprises a steel mounting bracket 600, fixed at one end to the aluminum side wall of the upper section 12 of the pressure box. A slot (not shown) is provided near the opposite end of bracket 600, through which a post 610 rides. The post 610 is mounted to the top of the heating or cooling bar at one end and capped at the opposite end 612, thereby limiting the vertical displacement distance of the heating and cooling bars. The bracket for the lower section heating and cooling bars 620 is also a steel bracket, but it is rigidly attached to both the heating and cooling bars and the aluminum side wall of the lower section 14 of the pressure box.

A side pressure seal 650 is illustrated in FIG. 4 and illustrated in greater detail in Figure 4A. This seal is formed from a high temper curved aluminum slat 700 (e.g., 0.008 x 1 3/8" - Venetian blind) sandwiched between 2 mil PTFE (Teflon®) tape 710 on the upper side and 10 mil ultrahigh molecular weight polyethylene tape 720 on the bottom side. The seal is held in place by a steel

- 12 -

bracket 670.

As illustrated in Figures 5 and 6, it has been discovered that the aluminum pressure seal taught in Figure 4A can be simplified, such that the side and inlet pressure seals consists predominantly of the curved aluminum slat 700 as previously described. The ultrahigh molecular weight polyethylene tape can be omitted and the PTFE tape can be omitted, except in the corners of the pressure box, where the tapes still prove useful. This improved side seal and inlet pressure seal is illustrated in Figure 5.

The exit pressure seal is shown in Figure 6. In addition to the curved aluminum slat 700, the belt side of the aluminum slat is coated with 5 mil PTFE (Teflon®) fiberglass cloth 800, which extends beyond the end of the aluminum seal and mounts to the inside of the pressure box frame. This exit seal design keeps the drive belt from binding on the aluminum slat.

As discussed above, one may also replace these metal seals or more inflatable rubber bladders, which offer several advantages not provided by the above-described metal seals. See Figures 7A, 7B and 7C, which depict the positioning of one inflatable bladder 200 (e.g., silicone rubber) on the peripheral edges of the pressure box (Fig. 7A); the bladder 200 as inflated with the Teflon coated metal slip plate 210 (Fig. 7B); and the bladder 200 as partially deformed via belt contact (Fig. 7C) creating the desired seal for the pressure box. A channel 220 is provided in the frame of the pressure box wall for attachment of the rubber bladder (Fig. 7C). An inflatable bladder of this type is used for both the upper and the lower portions of the pressure box.

As the bladders are inflated against the belts, a uniform sealing pressure is created around the periphery of the pressure box. This contrasts with the all-metal seal embodiment, in that the pressure applied to the belts is much more uniform and constant. Also, the bladder sealing effect is much more efficient; as the bladder is provided with a slip-seal surface comprising a metal strip coated with Teflon. This surface directly contacts the belts and allows for smooth

- 13 -

running of the same. Direct contact between the belts and the rubber bladder is thus avoided. In the all-metal seal embodiment, a portion of the sealing pressure is contributed by the weight of the floating heating and cooling bars, and leakage of the seals can occur, particularly at the inlet and outlet ends of the laminator.

As described above, this invention is also directed to a method of manufacturing non-woven fabrics using the preferred pressure lamination apparatus, and to the non-woven fabrics formed thereby.

PCT Publication No. WO 00/41523 describes a non-woven warp yarn fabric material, which is one preferred substrate for lamination in the present invention. In general, the PCT Publication describes one preferred substrate for use in the pressure laminator of the present invention. The substrate of the PCT Publication comprises a plurality of yarns that are formed into an aligned group, substantially parallel and equally spaced apart, and held together by a hot melt adhesive applied to one side of the fiber group. This fiber orientation, in which the fibers run in the machine direction, creates a non-woven fabric material substrate in which the fibers mimic warp yarns, which can be combined with one or more woven or non-woven fiber substrates and pressure laminated to create finished products that have the visual impression and physical feel of a woven material.

PCT Publication No. WO 00/41523 also describes the formation of a preferred substrate material used in the pressure laminator of the present invention. In general, the PCT Publication describes an apparatus for fabricating a non-woven fabric composite, which has the appearance of a woven fabric. The apparatus includes a supply station for adhesive coated parallel warp yarns, a support structure for orienting the parallel warp yarns into a cylindrical orientation with the adhesive film on the outside, a weft yarn applicator for wrapping weft yarns around the cylindrically oriented warp yarns, a heating station for activating the adhesive and a cooling station for setting the adhesive, and a cutter for severing the cylindrically formed fabric composite so

- 14 -

that it can be flattened and wrapped onto a take-up roller, for transfer to the pressure laminator of the present invention.

The weft yarn applicator disclosed in the PCT Publication includes a rotating drum wherein a plurality of spools of weft yarn material are mounted in circumferentially spaced relationship and a tensioner is provided for applying the weft yarn material around the warp yarns in a predetermined tension which may be the same as, greater than, or less than the tension in the warp yarns. A conical aligner assures that the weft yarns will be delivered to the warp yarn cylinder in substantially perpendicular alignment.

PCT Publication No. WO 00/41523 designates the United States and as such, the disclosure of that publication is hereby incorporated herein by reference.

The present invention has been described in detail, including the preferred embodiments thereof. However, it will be appreciated that those skilled in the art, upon consideration of the present disclosure, may make modifications and/or improvements on this invention and still be within the scope and spirit of this invention as set forth in the following claims.



- 15 -

## WHAT IS CLAIMED IS:

1. A pressure lamination apparatus comprising:
  - (a) a housing or frame in which a pressure box is mounted;
  - (b) said pressure box comprising two spaced apart pressurizable sections, an upper section and a lower section, wherein the space formed between the two sections defines a lamination section;
  - (c) two counter rotating drive belts, an upper drive belt and a lower drive belt, rotatably mounted in said housing or frame, wherein said belts contact one another at and pass in the same direction through the lamination section;
  - (d) a fluid medium pressure generator for supplying pressure to the upper and lower sections of the pressure box for compressing said drive belts moving there between; and
  - (e) whereby, depending upon the direction of rotation of said belts, one end of the lamination section acts as an inlet for substrates to be laminated and the opposite end acts as an outlet for pressure laminated materials.
2. The pressure lamination apparatus of claim 1, wherein the upper section of the pressure box further comprises a heat source.
3. The pressure lamination apparatus of claim 2, wherein the heat source comprises a plurality of heating elements.
4. The pressure lamination apparatus of claim 2, wherein the heat source comprises a steam powered heating section.
5. The pressure lamination apparatus of claim 1, wherein the upper section of the pressure box further comprises a cooling source.
6. The pressure lamination apparatus of claim 5, wherein the cooling source comprises a plurality of cooling elements.

- 16 -

7. The pressure lamination apparatus of claim 5, wherein the cooling source comprises a cold water cooling section.

8. The pressure lamination apparatus of claim 1, wherein the lower section of the pressure box further comprises a heat source.

9. The pressure lamination apparatus of claim 8, wherein the heat source comprises a plurality of heating elements.

10. The pressure lamination apparatus of claim 9, wherein the lower heating elements are fixed in place.

11. The pressure lamination apparatus of claim 8, wherein the heat source comprises a steam powered heating section.

12. The pressure lamination apparatus of claim 1, wherein the lower section of the pressure box further comprises a cooling source.

13. The pressure lamination apparatus of claim 12, wherein the cooling source comprises a plurality of cooling elements.

14. The pressure lamination apparatus of claim 12, wherein the cooling source comprises a cold water cooling section.

15. The pressure lamination apparatus of claim 13, wherein the lower cooling elements are fixed in place.

16. The pressure lamination apparatus of claim 1, wherein lower section of the pressure box is mounted rigidly to the frame or housing.

17. The pressure lamination apparatus of claim 1, wherein the upper section of the pressure box is mounted to the frame in an adjustable manner.

- 17 -

18. The pressure lamination apparatus of claim 1, wherein the pressure box sections further comprise pressure seals at the sides and the inlet and outlet ends of the lamination section.

19. The pressure lamination apparatus of claim 18, wherein the pressure seals comprise metal.

20. The pressure lamination apparatus of claim 18, wherein the pressure seals comprise one or more rubber bladders.

21. The pressure lamination apparatus of claim 18, wherein the drive belts are pressurized within a range of from about 5000 lbs to about 50,000 lbs, over an area of about 1500 in<sup>2</sup>.

22. The pressure lamination apparatus of claim 18, wherein the drive belts are pressurized within a range of from about 10,000 lbs to about 25,000 lbs, over an area of about 1500 in<sup>2</sup>.

23. The pressure lamination apparatus of claim 18, wherein the drive belts are pressurized at about 15,000 lbs over an area of about 1500 in<sup>2</sup> or 10 psi.

24. A laminated non-woven fabric formed in the apparatus of claim 1, said laminated fabric comprising:

a first non-woven layer and a second non-woven layer laminated to one another to form a laminated composite fabric;

said first non-woven layer having yarns aligned in the machine direction;

said second non-woven layer having yarns aligned substantially perpendicular to the machine direction;

said laminated composite fabric further including a film of adhesive disposed between the first and second non-woven layers.



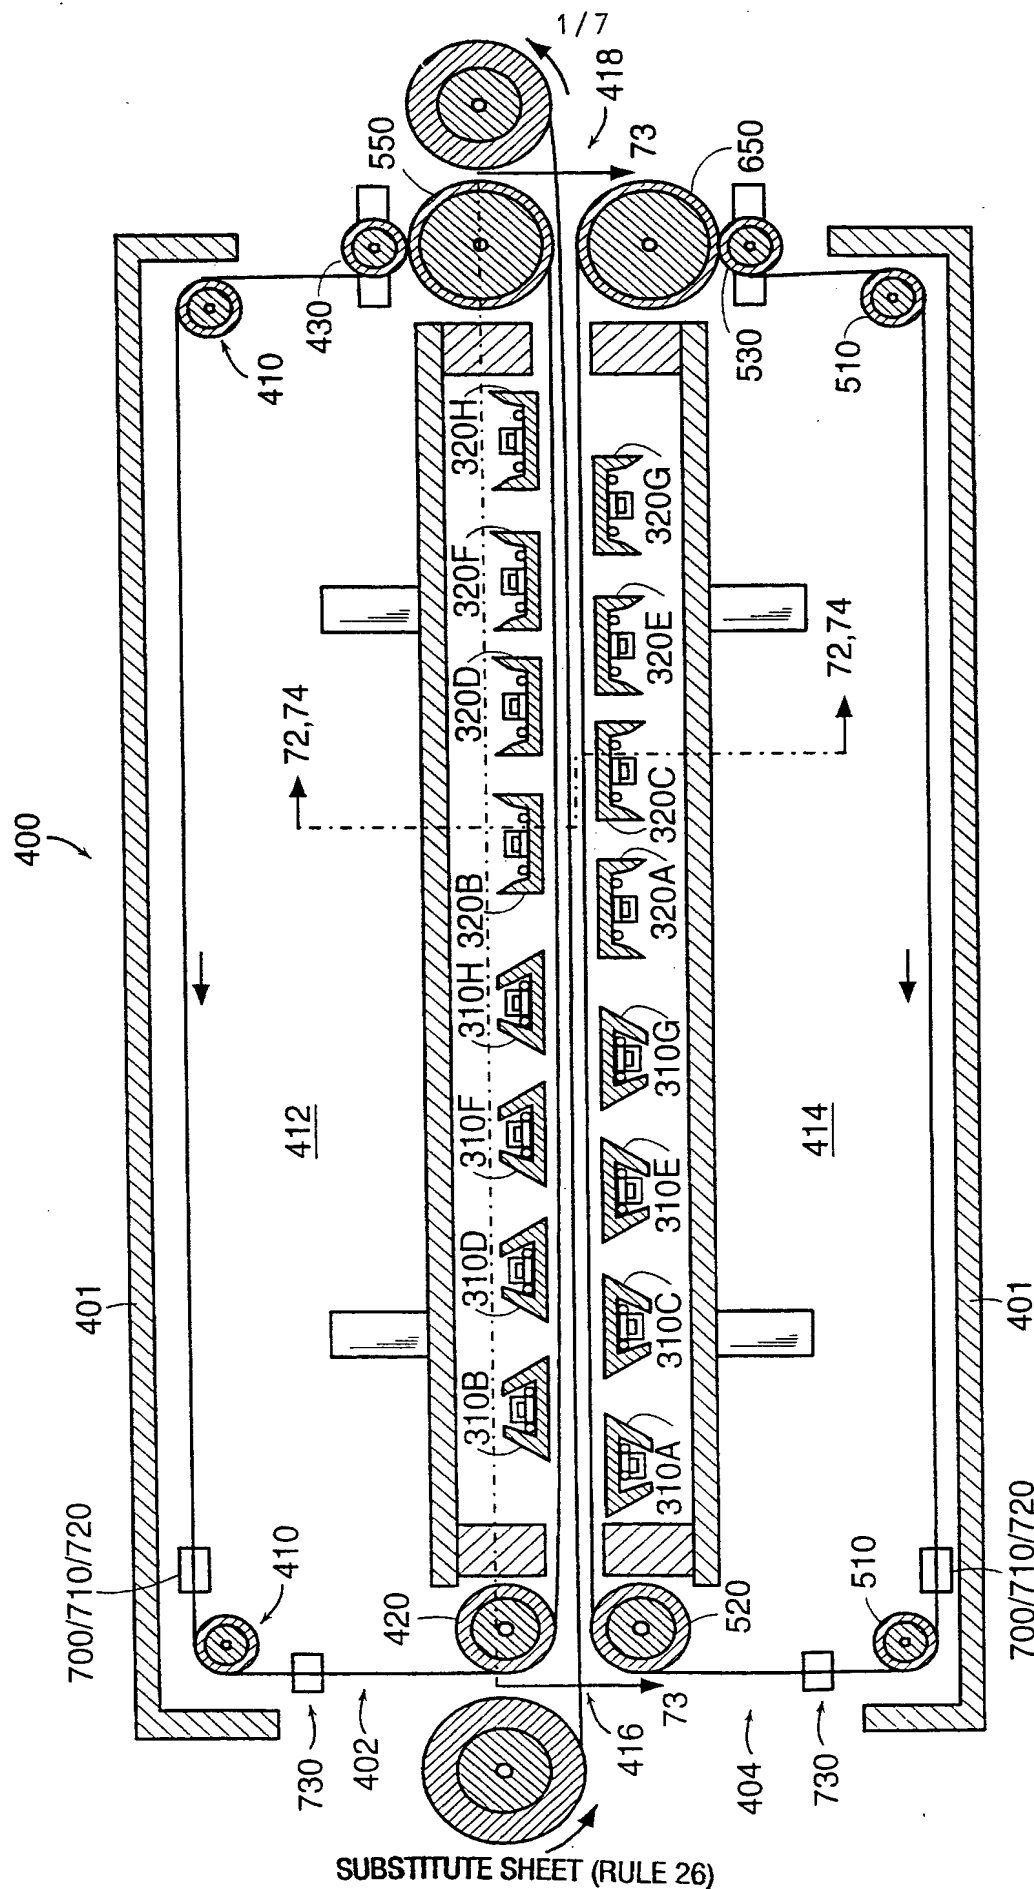


FIG. 1



2/7


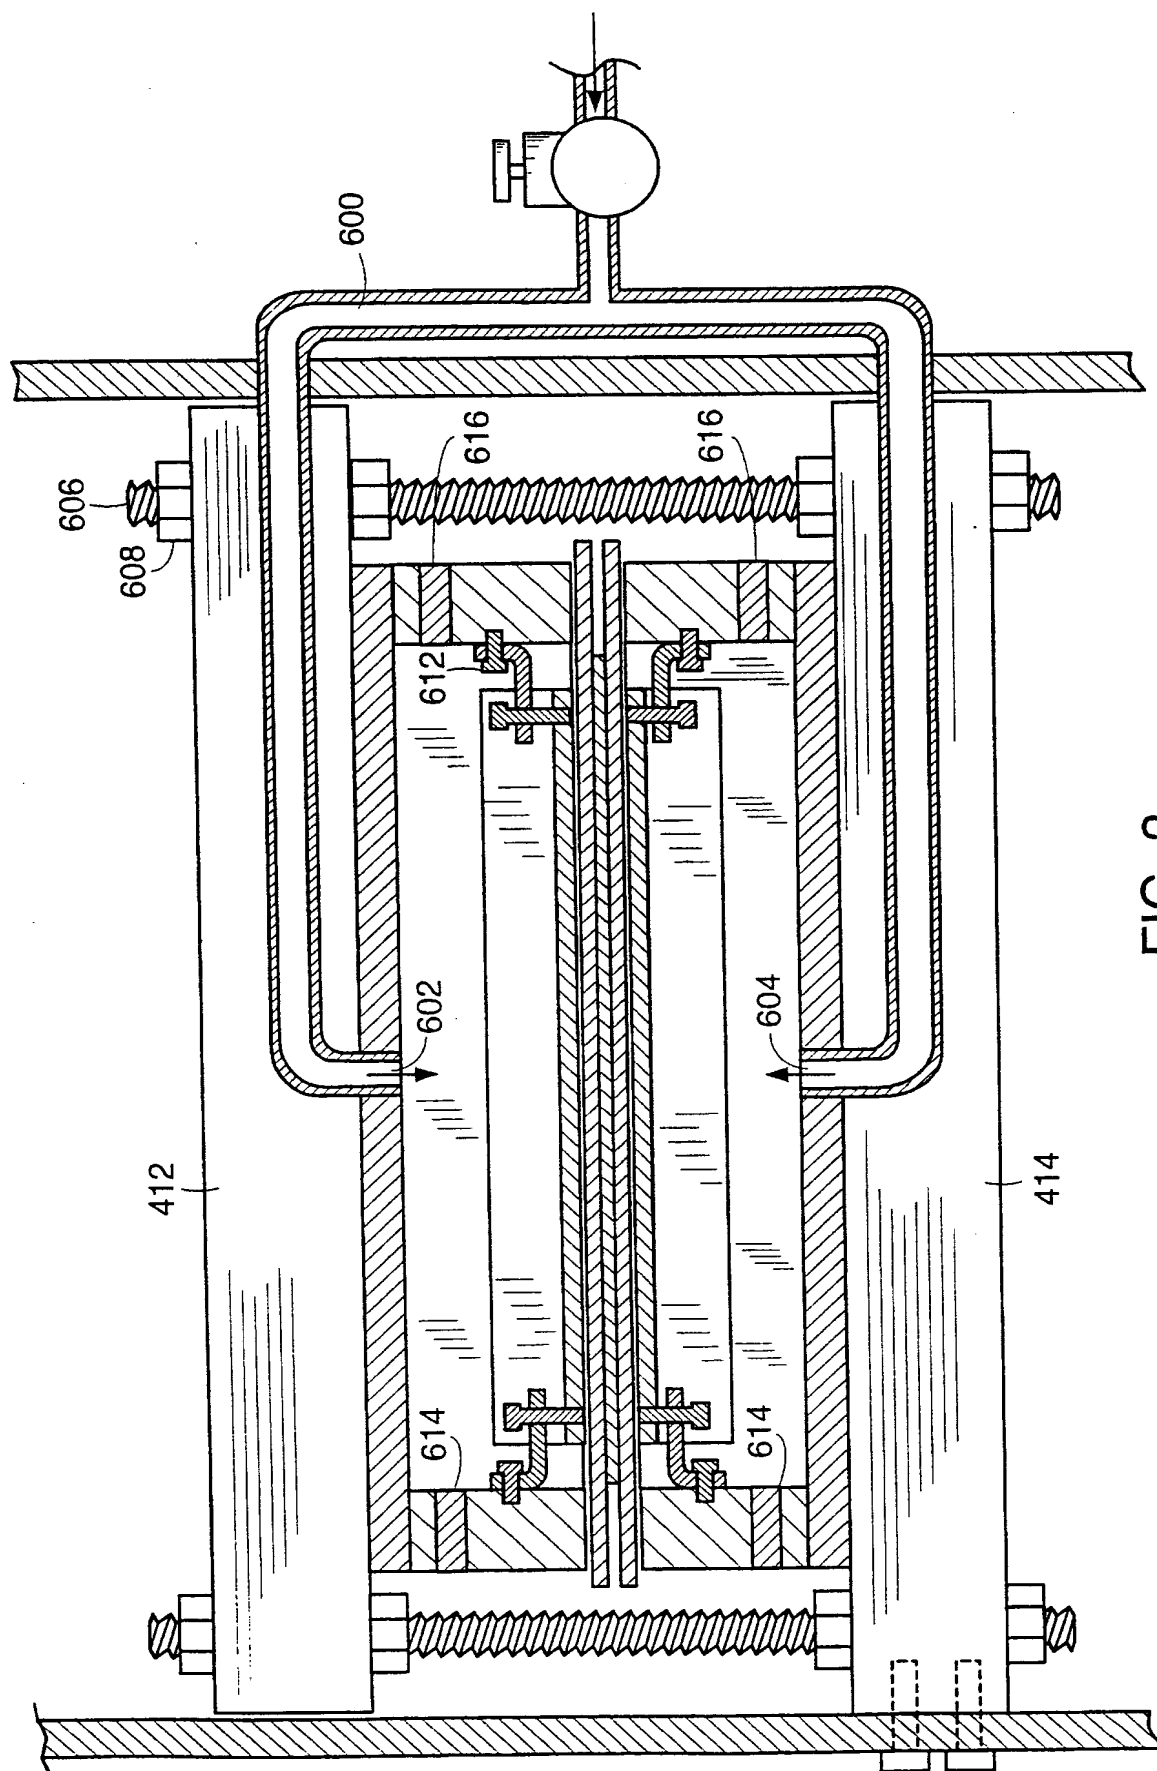


FIG. 2





3/7

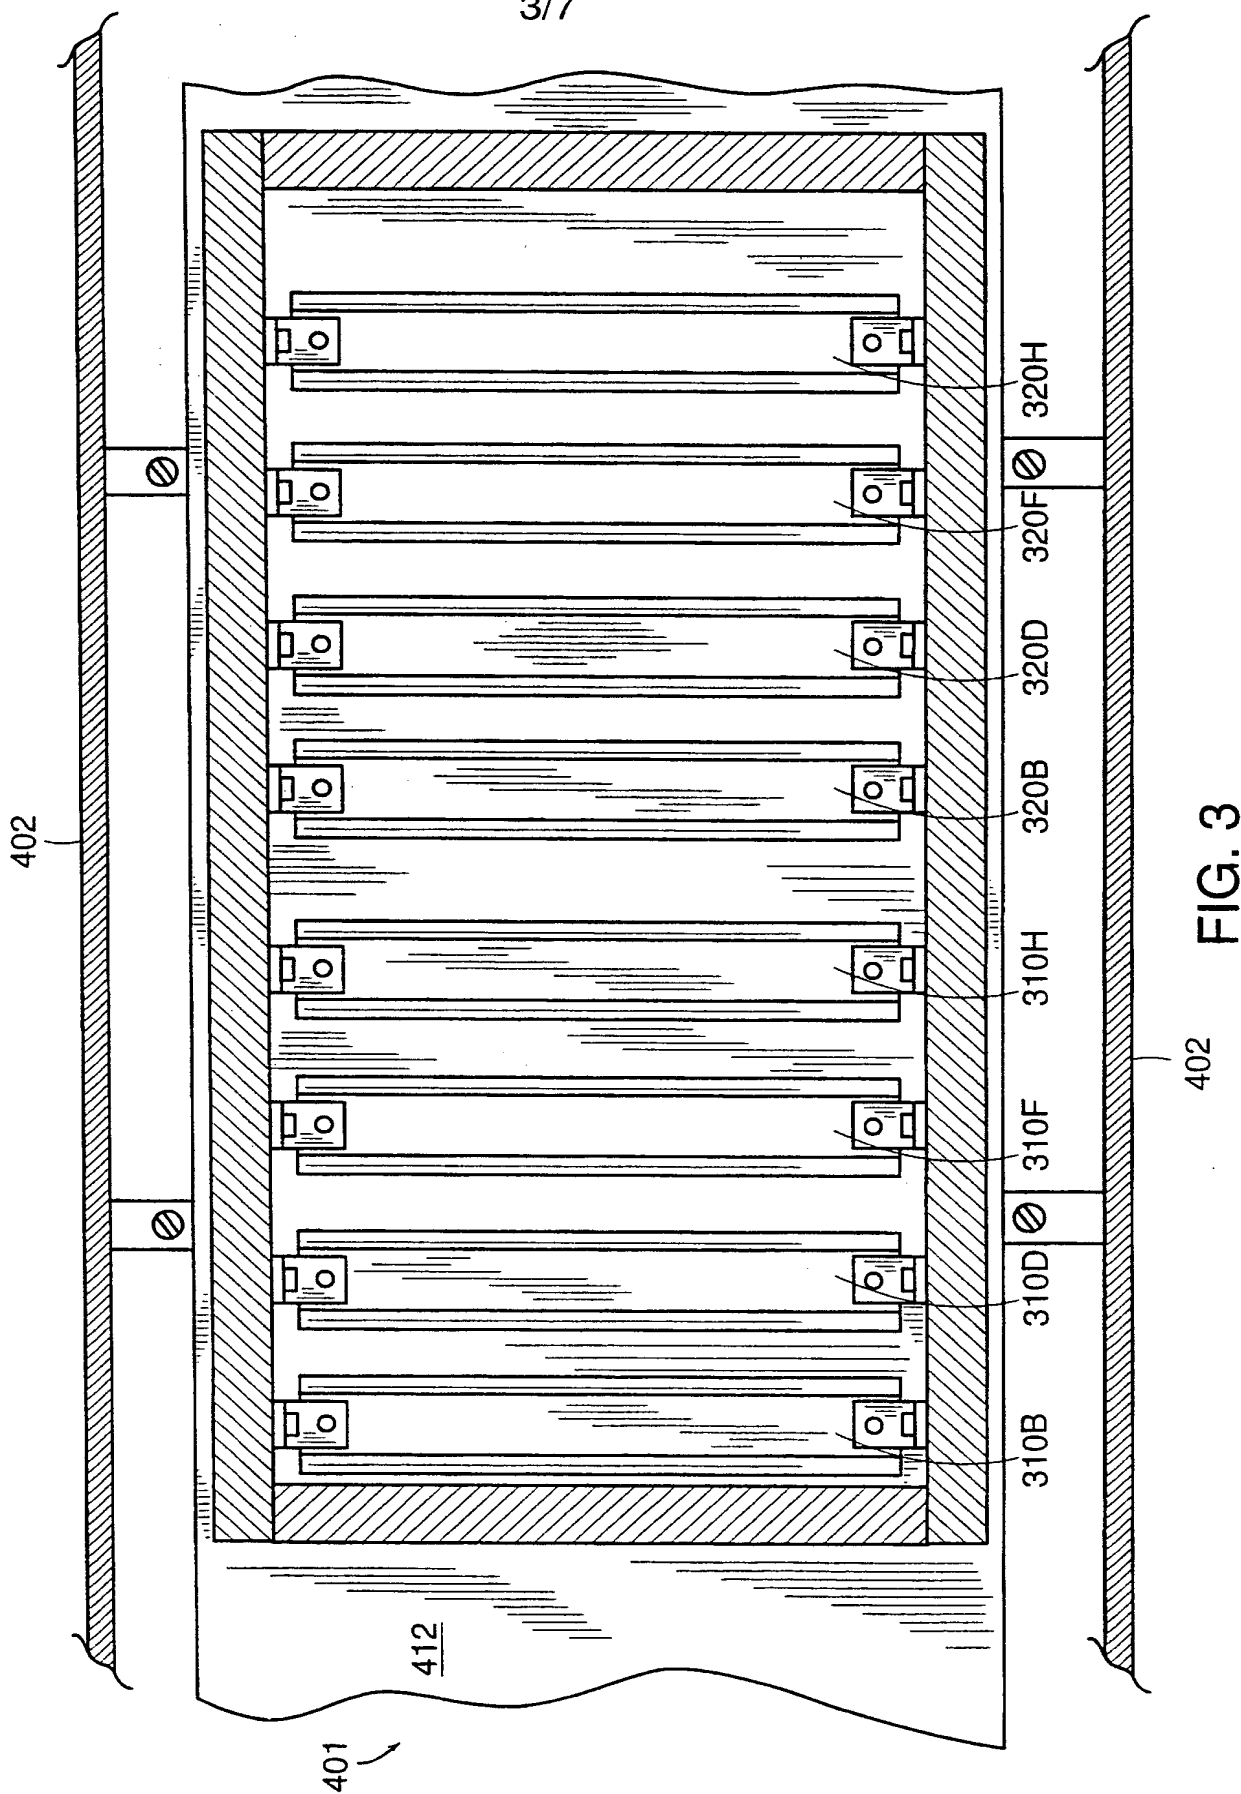



4/7

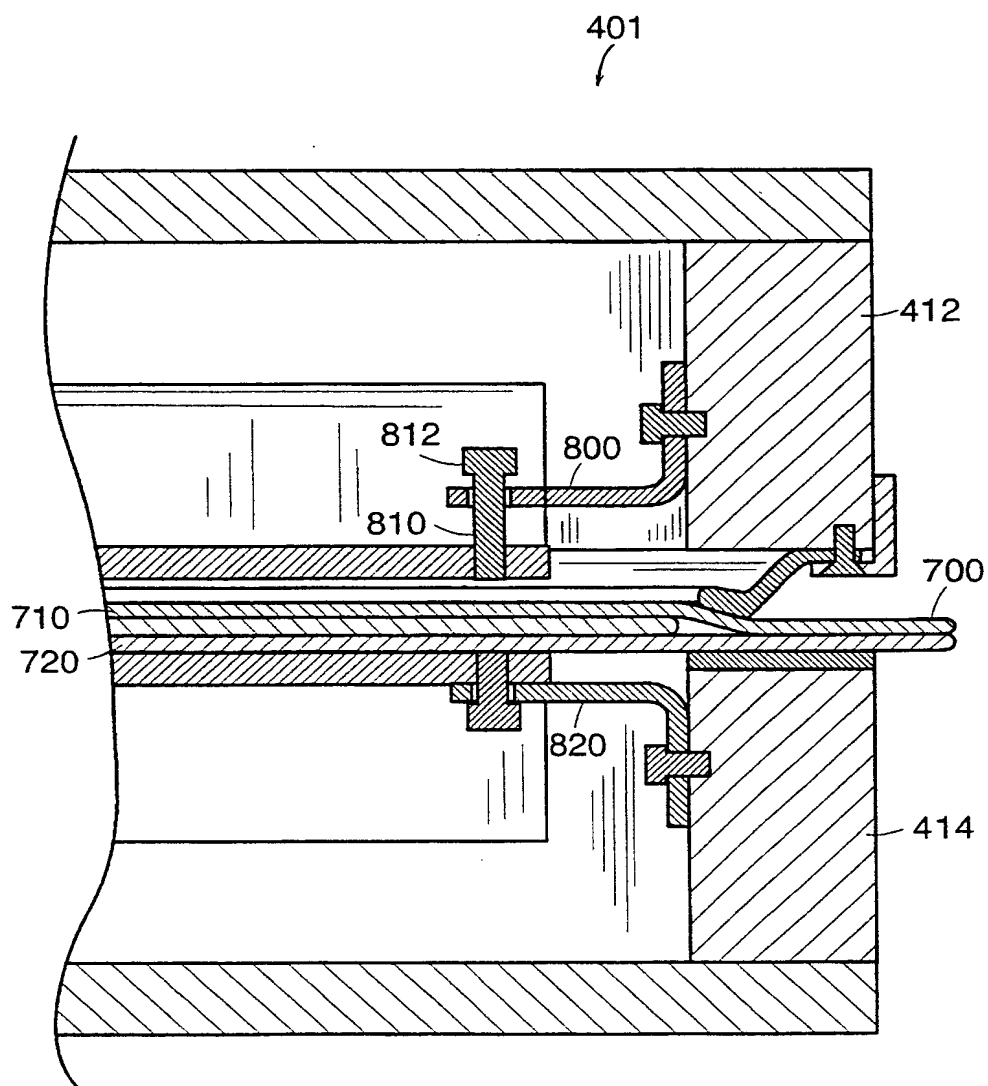


FIG. 4



5/7

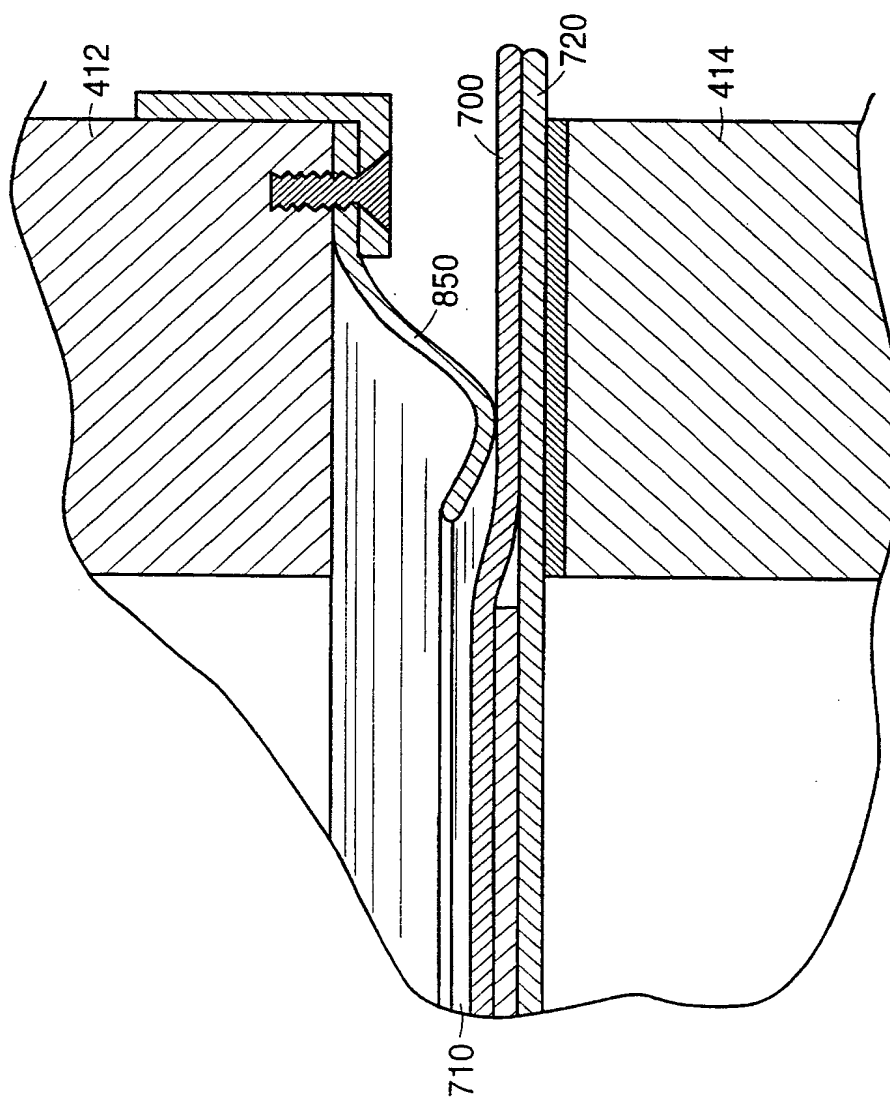


FIG. 5



6/7

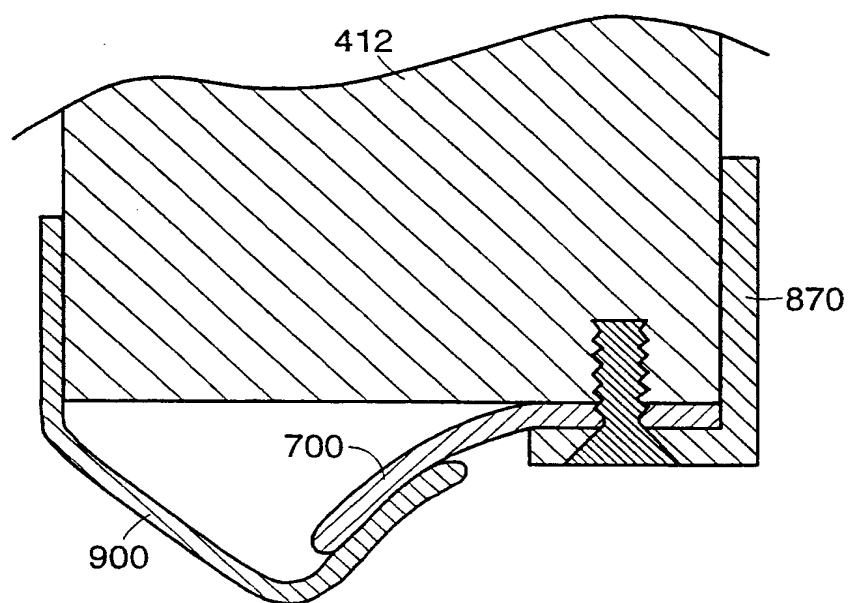


FIG. 6





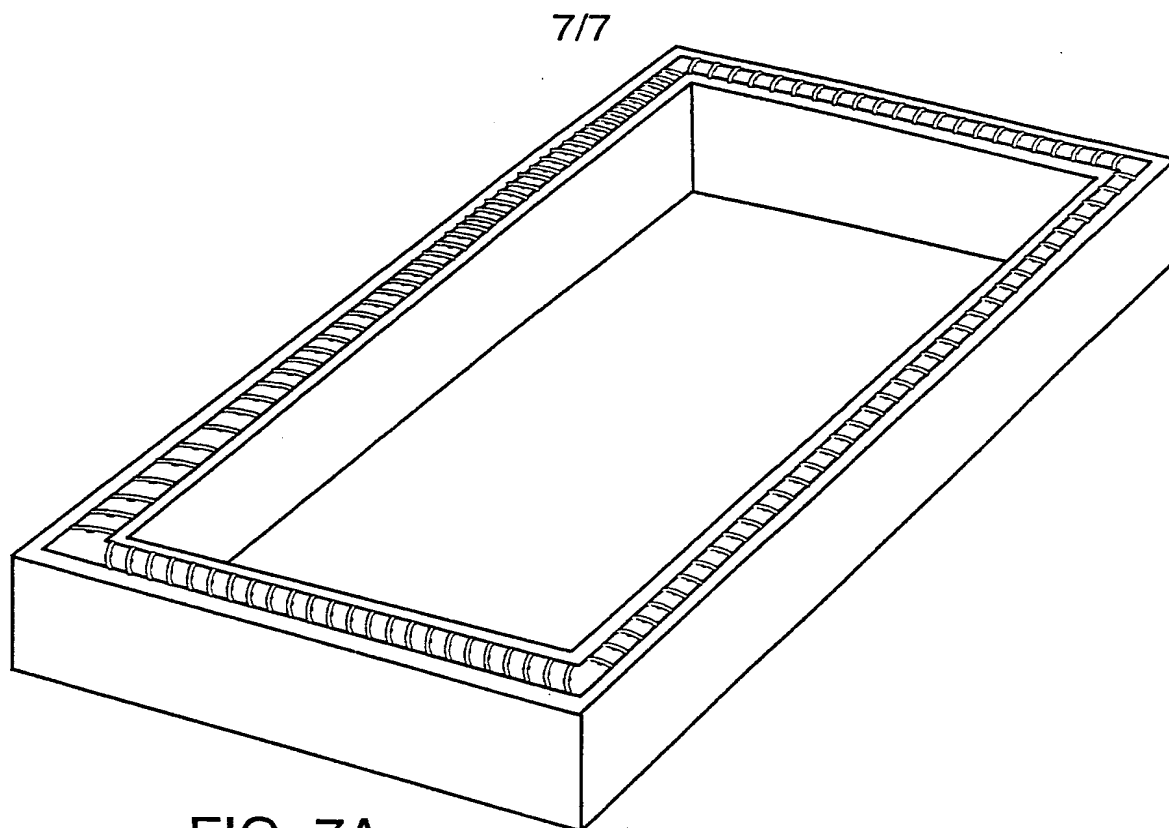


FIG. 7A

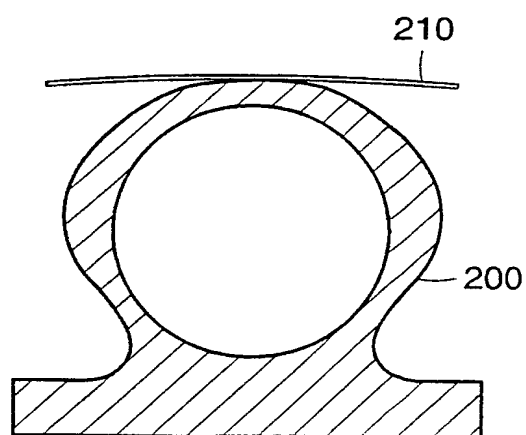


FIG. 7B

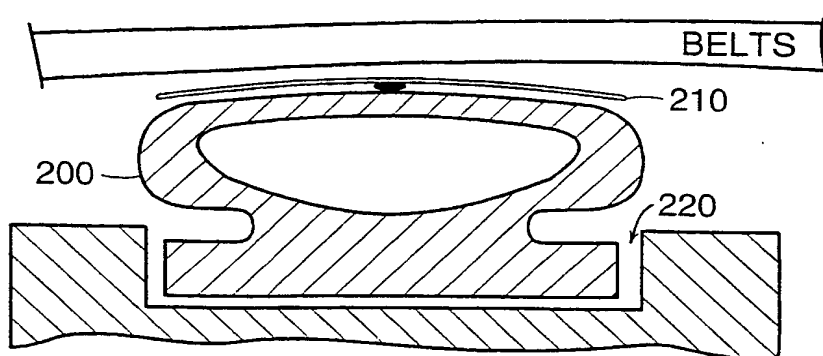


FIG. 7C

SUBSTITUTE SHEET (RULE 26)



# INTERNATIONAL SEARCH REPORT

In. ational Application No

PCT/US 00/25680

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 B32B31/00 B30B5/06 D04H3/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B32B B30B D04H B29C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 01 210318 A (MITSUBISHI RAYON ENG CO LTD) 23 August 1989 (1989-08-23) figures	1, 16, 18
X	& PATENT ABSTRACTS OF JAPAN vol. 013, no. 519 (M-895), 20 November 1989 (1989-11-20) & JP 01 210318 A (MITSUBISHI RAYON ENG CO LTD), 23 August 1989 (1989-08-23) abstract  --- -/--	1, 16, 18

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \* & \* document member of the same patent family

Date of the actual completion of the international search

22 January 2001

Date of mailing of the international search report

08/02/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Barathe, R

# INTERNATIONAL SEARCH REPORT

In .ational Application No

PCT/US 00/25680

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 63 267525 A (MITSUBISHI RAYON ENG CO LTD) 4 November 1988 (1988-11-04) figures	1,2,5,8, 12,18
X	& PATENT ABSTRACTS OF JAPAN vol. 013, no. 065 (M-797), 14 February 1989 (1989-02-14) & JP 63 267525 A (MITSUBISHI RAYON ENG CO LTD), 4 November 1988 (1988-11-04) abstract	1,2,5,8, 12,18
X	EP 0 255 596 A (MITSUBISHI RAYON ENG) 10 February 1988 (1988-02-10) figures	1,2,5,8, 12
P,X	WO 00 41523 A (HUNTER DOUGLAS IND BV ;HARTMAN DAVID (US); SWISCZ PAUL (US); HUNTE) 20 July 2000 (2000-07-20) cited in the application claims 130-143; figures 71-77	1-18, 21-24
X	US 4 687 528 A (HELD KURT) 18 August 1987 (1987-08-18) column 6, line 27 - line 44; figures	1
X	EP 0 470 584 A (KANEKAFUCHI CHEMICAL IND) 12 February 1992 (1992-02-12) column 3, line 21 - line 52; figures	1,2,8
X	DE 30 46 431 A (SANTRADE LTD) 9 September 1982 (1982-09-09) claims; figures	1,2,5,8, 12
X	DE 30 46 432 A (SANTRADE LTD) 19 August 1982 (1982-08-19) the whole document	1
X	US 4 498 941 A (GOLDSWORTHY WILLIAM B) 12 February 1985 (1985-02-12) the whole document	1
X	US 5 558 016 A (DE BROCK RAOUL) 24 September 1996 (1996-09-24) the whole document	1,18
A	US 3 591 434 A (HARTSTEIN FRED W) 6 July 1971 (1971-07-06) figures 1,7	1,24

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/25680

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
JP 01210318	A	23-08-1989	NONE		
JP 63267525	A	04-11-1988	NONE		
EP 0255596	A	10-02-1988	JP	1608262 C	28-06-1991
			JP	2033290 B	26-07-1990
			JP	63039308 A	19-02-1988
			JP	1634719 C	20-01-1992
			JP	2062369 B	25-12-1990
			JP	63039310 A	19-02-1988
			JP	1634720 C	20-01-1992
			JP	2062370 B	25-12-1990
			JP	63054222 A	08-03-1988
			DE	3766183 D	20-12-1990
			KR	9502097 B	13-03-1995
			US	4794855 A	03-01-1989
WO 0041523	A	20-07-2000	AU	3692500 A	01-08-2000
US 4687528	A	18-08-1987	DE	3515629 A	06-11-1986
			CN	86103035 A, B	12-11-1986
			DE	3662240 D	13-04-1989
			EP	0203368 A	03-12-1986
			JP	1638733 C	31-01-1992
			JP	3002661 B	16-01-1991
			JP	61255858 A	13-11-1986
			SU	1438636 A	15-11-1988
			SU	1542430 A	07-02-1990
EP 0470584	A	12-02-1992	JP	4262320 A	17-09-1992
			JP	4325246 A	13-11-1992
			JP	4091910 A	25-03-1992
			CA	2045987 A	07-02-1992
DE 3046431	A	09-09-1982	NONE		
DE 3046432	A	19-08-1982	NONE		
US 4498941	A	12-02-1985	US	4402778 A	06-09-1983
US 5558016	A	24-09-1996	DE	3719976 A	29-12-1988
			AT	69579 T	15-12-1991
			CN	1030045 A, B	04-01-1989
			DE	3866289 A	02-01-1992
			EP	0295427 A	21-12-1988
			ES	2026599 T	01-05-1992
			FI	882843 A, B,	16-12-1988
			IN	171921 A	06-02-1993
			JP	1091998 A	11-04-1989
			LV	11139 A	20-04-1996
			LV	11139 B	20-08-1996
			SU	1828438 A	15-07-1993
			US	5713271 A	03-02-1998
			ZA	8804234 A	29-03-1989
US 3591434	A	06-07-1971	DE	1785175 A	05-01-1972
			FR	1595577 A	15-06-1970
			GB	1230586 A	05-05-1971

